

Accelerating AI-driven Inference for Edge Infrastructures







Bringing AI to the Edge

In today's fast-paced digital landscape, Edge AI is truly transforming the way network operations are conducted. By enabling real-time data processing and analysis directly at the source, Edge AI significantly reduces latency, minimizes bandwidth consumption, and enhances both privacy and security. This revolutionary approach allows organizations to harness the power of AI closer to where data is generated, leading to faster, more efficient, and highly secure operations across a wide range of industries and applications.

At Lanner, we are at the forefront of this transformation, offering a comprehensive suite of Edge AI platforms specifically designed to bring advanced AI capabilities to the edge of your network. Our product portfolio includes everything from compact Edge AI gateways to robust, high-performance servers, all meticulously engineered for real-time decision-making at the network's edge. These solutions are built to meet the demanding needs of applications such as computer vision, network security, and telecommunications, where low latency, stringent security measures, and efficient data handling are not just desirable, but essential.

By integrating Lanner's Edge AI solutions, organizations can unlock new levels of operational efficiency and security, ensuring they are well-equipped to meet the challenges of today and tomorrow. Whether you are looking to enhance network security, improve data processing speeds, or implement cutting-edge AI applications, Lanner's reliable and innovative Edge AI platforms provide the foundation you need to succeed.

Jeans Tseng
CTO

Edge AI Platforms Overview

Integrated with AI hardware accelerators and pre-validated with AI solution partner, Lanner's Edge AI platforms enable edge computing solutions with specific requirements for low-latency, high-throughput, and/or power efficiency in reliable and mission-critical applications.

These AI-accelerated hardware solution includes Edge AI servers, rugged computers, acceleration modules and AI starter kits. Pre-validated by world's leading software companies, Lanner provides system integrators a turnkey, all-in-one edge AI platform, composed of a high-performing AI model and a powerful NVIDIA-certified edge AI appliance.



Vision AI

Enable higher volume & low-latency video analytics solutions for mission-critical applications, such as smart retail, smart manufacturing, physical security, traffic monitoring, and more.



Telco AI

Build scalable, GPU-accelerated multi-node edge computing platform for software-defined 5G/6G applications, such as multi-access edge computing (MEC) and RAN intelligence.



Network AI

Lanner provides comprehensive AI-accelerated network security appliances designed to conduct proactive security defense, enabling real-time threat detection, adaptive responses, and predictive analytics.



Agentic AI

Lanner provides MGX-based Edge AI servers by consolidating CPU, GPU, and DPU in a single unit, ensuring efficient handling of extensive AI models for offline LLMs and generative AI deployment.



Ecosystem Partners

Silicon Partners



NVIDIA

NVIDIA has been a pioneer in accelerated computing. The company's invention of the GPU in 1999 sparked the growth of the PC gaming market, redefined computer graphics, ignited the era of modern AI and is fueling the creation of the metaverse.



Intel

Intel OpenVINO™ toolkit is a comprehensive toolkit for quickly developing applications and solutions that solve a variety of tasks, including emulation of human vision, automatic speech recognition, natural language processing, and many others.

Computer Vision Software Partners



Chooch

Chooch is a leading Vision AI platform that combines Generative AI and Computer Vision to help businesses automate repetitive, manual visual review tasks.



Data From Sky

Data From Sky offers TrafficXRoads, a highly optimized and fully configurable trajectory processing engine that evaluates multiple detection tasks simultaneously within each camera's field of view, ensuring unparalleled accuracy and efficiency in traffic monitoring and management.



Ironyun

IronYun offers more than 30 advanced AI video analytics functions to bring intelligence and accuracy to existing camera and video infrastructures.



Network Optix

Network Optix is at the forefront of video software innovation, developing sophisticated solutions that convert video data into practical insights for businesses and industries of all kinds.



GoodVision

GoodVision provides automation tools in all stages of traffic projects, from AI traffic data collection to traffic modelling and real-time traffic control.



Gorilla

Gorilla is a global solution provider in Security Intelligence, Network Intelligence, Business Intelligence and IoT technology.



Milestone Systems

Milestone Systems aims to make the world see by empowering people, businesses and societies with data-driven video technology.

Network Security & Telco Software Partners



F5

F5 partners with the world's largest, most advanced organizations to optimize and secure every app and API anywhere, including on-premises, in the cloud, or at the edge.



Arrcus Networks

The Arrcus Connected Edge (ACE) platform offers best-in-class networking with the most flexible consumption model at the lowest total cost of ownership.



Namla

Namla offers a Software platform which allows B2B (Business To Business) and MSPs (Managed Service Providers) customers to have a turnkey hybrid-cloud native Edge solution.

Vision AI

AI video analytics is the process of leveraging artificial intelligence and machine learning algorithms to analyze and interpret video data. This allows for the automatic detection of objects, recognition of actions and behaviors, and generation of business intelligence that can be used to improve safety, security, and efficiency in a variety of applications.

Lanner offers a full range of AI-accelerated Edge AI platforms that enable video analytics solutions in industrial settings. With embedded AI accelerators to process deep learning inferencing in real-time, these edge AI computers are designed to handle multiple streams of video simultaneously, detecting and analyzing a wide range of objects, faces, and actions in industrial environments.



Edge AI Servers for Video Analytics

- ✓ Retail Ad Metrics & Dwell Analysis
- ✓ Factory Quality Inspection
- ✓ Traffic Management
- ✓ City Physical Security



Edge AI Computer



Intel® Core™ Ultra



Intel® Core™ Ultra



Industrial Edge AI



Industrial Edge AI

Model Name	EAI-I500	EAI-I510 NEW	EAI-I730	EAI-I731
Processor System	Intel® Core™ Ultra 7/5 (Meteor Lake-H/U)	Intel® Core™ Ultra 9/7/5 (Series 2)	12/13/14th Gen. Intel® Core i	12/13/14th Gen. Intel® Core i
AI Acceleration Support	Hailo-8 AI Accelerator (by request)	Hailo-8 AI Accelerator (by request)	NVIDIA L4, A2, A10, RTX Series or any FHHL GPU cards (Up to 150W)	NVIDIA A2, L4, RTX Series or any FHHL GPU cards (up to 75W)
Fanless	Yes	Yes	YES	YES
Max. Memory	96GB	96GB	96GB	96GB
Storage	2x 2.5" SATA SSD	2x 2.5" x 7mm (SATAIII) 1x M.2(NVMe) 2280 M-Key	1x M.2 M-key & 2x M.2 B-Key 4x 2.5" Removable HDD/SSD	1x M.2 M-key & 2x M.2 B-Key 2x 2.5" Removable HDD/SSD
Ethernet	3x 2.5GbE RJ45, 1x GbE RJ45	2x 2.5GbE RJ45, 2x 10GbE RJ45	2x 2.5GbE RJ45	2x 2.5 GbE RJ45
I/O	2x COM, 4x DIO, 4x USB	2x COM, 4x DIO, 4x USB, 2x DP 1.2 2x Audio	2x COM, 8x USB 3.2, 1x HDMI, 1x DP 1.4, 4x DIO, Audio	1x Console, 2x COM, 1x HDMI, 1x DP 1.4, 8x USB, 4x DIO, Audio
Expansion	1x M.2 B-key & E-key 1x M.2 2280 M-key NVMe	1x 2230 M.2 E-key 1x Nano-SIM	1x M.2 B-key for 5G Sub6 / LTE 1x M.2 E-key for WiFi 2x PCIe*4, 2x PCIe*16	1x M.2 B-key for 5G Sub6 / LTE 1x M.2 E-key for WiFi 1x PCIe*16, 1x PCIe*4
Power	+24VDC	+24VDC	100 ~ 240VAC	12/24 VDC
Mechanical (W x D x H)	287 x 180 x 76 mm	270 x 180 x 119 mm	374 x 419 x 250 mm	190 x 286 x 250 mm
Environment	0°C~40°C	0°C~40°C	-25°C~65°C	-25~65°C
Driver Support	Win 10 IoT Linux Dabian 11, Ubuntu 22.04	Win 10 IoT Linux Dabian 11, Ubuntu 22.04	Win 10 IoT Linux Dabian 11, Ubuntu 22.04	Win 10 IoT Linux Dabian 11, Ubuntu 22.04
Certification	CE/UKCA, Class A, UL/CB 62368-1	CE/UKCA, Class A, UL/CB 62368-1	CE/FCC Class A, UKCA, UL, CB	CE/FCC Class A, UKCA, UL, CB

Edge AI Computer



NVIDIA Jetson Orin



NVIDIA Jetson Orin



NVIDIA Jetson AGX Orin



NVIDIA Jetson AGX Orin

Model Name	EAI-I131	EAI-I133	EAI-I233 NEW	EAI-I251 NEW
Processor System	NVIDIA® Jetson Orin NX/Nano	NVIDIA® Jetson Orin NX/Nano	NVIDIA® Jetson AGX Orin	NVIDIA® Jetson AGX Orin
AI Acceleration Support	NVIDIA Ampere Architecture	NVIDIA Ampere Architecture	NVIDIA Ampere Architecture	NVIDIA Ampere Architecture
Fanless	YES	YES	1x 12V Fan	1x 12V Fan
Max. Memory	16GB	16GB	64GB	64GB
Storage	1x M.2 M-key NVMe	1x M.2 M-key NVMe	1x M.2 M-key NVMe eMMC 5.1 64GB	1x M.2 M-key NVMe eMMC 5.1 64GB
Ethernet	2x GbE RJ45 for PoE+	3x GbE RJ45	1x GbE RJ45, 1x 10GbE RJ45 1x 2.5GbE RJ45	1x GbE RJ45, 1x 10GbE RJ45 2x 2.5GbE RJ45 w/ PoE+
I/O	2x COM, Audio, 2x USB 2.0 1x HDMI, 4x DIO	2x COM, 4x USB, 1x HDMI	1x COM, 1x HDMI, 4x USB 3.2	2x COM, 1x HDMI, 4x USB 3.2, 4x DIO, 8x GMSL2, Audio
Expansion	1x M.2 B-key for 5G Sub6 / LTE 1x M.2 E-key for WiFi	1x M.2 B-key for 5G Sub6 / LTE 1x M.2 E-key for WiFi	1x M.2 B-key for 5G Sub6 / LTE 1x M.2 E-key for WiFi 1x Nano-SIM	1x M.2 B-key for 5G Sub6 / LTE 1x M.2 E-key for WiFi 2x Nano-SIM
Power	Typical +12VDC	12VDC	Typical +12 or +24VDC	12/24VDC
Mechanical (W x D x H)	201 x 196 x 65 mm	167 x 179.5 x 30 mm	169.2 x 181.7 x 70 mm	201 x 196 x 95 mm
Environment	-40°C~70°C	0°C~40°C	0°C~40°C	-40°C~70°C
Driver Support	Linux Ubuntu 22.04, NVIDIA Jetpack 6.2	Linux Ubuntu 22.04, NVIDIA Jetpack 6.2	Linux Ubuntu 22.04, NVIDIA Jetpack 6.2	Linux Ubuntu 22.04, NVIDIA Jetpack 6.2
Certification	CE/FCC Class A, UL	CE/FCC Class A, UL	CE/FCC Class A, UL+CB	CE/FCC Class A, UKCA, UL+CB

Edge AI Computer



Vehicle Edge AI



Vehicle Edge AI



Railway Edge AI

Model Name	EAI-V151 NEW	EAI-V330	EAI-R530
Processor System	NVIDIA® Jetson Orin NX/Nano	Intel® Atom® x6000 Series	13th Gen. Intel® Core i7-1300 Series
AI Acceleration Support	NVIDIA Ampere Architecture	M.2 Hailo-8 AI Accelerator	NVIDIA MXM A2000 GPU cards
Fanless	YES	YES	YES
Max. Memory	16GB	32GB	64GB
Storage	1x M.2 M-key NVMe	1x eMMC 128GB onboard 1x 2.5" SATA drive bay	2x M.2 M-key NVMe 2x 2.5" SATA drive bay in a caddy
Ethernet	1x GbE RJ45, 2x GbE PoE+	6x GbE RJ45(4x GbE PoE)	4x 2.5GbE RJ45, 2x 2.5GbE PoE+
I/O	2x COM, 2x USB 3.2, 1x HDMI, 4x DIO, Audio, GNSS/G-sensor	4x USB, 2x COM, 1x CAN 2.0 4x DI, 2x DO, 2x HDMI, GNSS/G-sensor	1x Console, 3x USB, 4 GNSS, 1x OOB
Expansion	1x M.2 B-key for 4G LTE/ 5G sub6 1x M.2 E-key for WiFi	1x M.2 B-key for 4G LTE/ 5G sub6 1x M.2 E-key for WiFi	2x M.2 M-key for 5G Sub6 / LTE 1x M.2 E-key for WiFi 1x PCIe*8 Gen 3 MXM (optional) 4x PGN Modules (optional)
Power	12/24VDC	12 ~ 48VDC	24 ~ 110VDC
Mechanical (W x D x H)	201 x 196 x 65 mm	273.8 x 185 x 98 mm	438 x 111.25 x 300 mm
Environment	-40°C~70°C	-40°C~70°C	-40°C~70°C
Driver Support	Linux Ubuntu 22.04, NVIDIA Jetpack 6.2	Linux kernel 2.6.X, Ubuntu 22.04, Debian 10, Win 10/11 IoT	Linux Debian 10, Win 11 IoT
Certification	CE/FCC Class A, UKCA, UL, CB, E-Mark (E24)	CE/FCC Class A, UKCA, E13, UL/cUL & CB, MIL-STD-810G	CE/FCC Class A, MIL-STD-810G, EN50155, EN45545-2, UL+CB

Network AI


In the rapidly evolving landscape of network security, the integration of AI has emerged as a game-changer. By employing advanced algorithms and machine learning, AI-powered network security has ushered in a new era of proactive defense, enabling real-time threat detection, adaptive responses, and predictive analytics.

Specializing in providing network security hardware solutions, Lanner stands as a vanguard pioneering the fusion of advanced network appliances and AI accelerators that empower AI-driven network security with unparalleled efficiency, performance, and scalability. Lanner's AI-powered network appliances can process colossal volumes of data, enabling AI algorithms to swiftly discern anomalies, predict threats, and fortify defences in real time.



AI Starter Kit: AI-Powered Next-Generation Firewall

Next-generation firewalls (NGFWs) are evolving to combat new cybersecurity threats such as ransomware, zero-day attacks, and phishing, as well as ongoing threats like distributed denial of service (DDoS) attacks. This evolution incorporates artificial intelligence and machine learning (AI/ML) to create a more dynamic rules database. AI-driven detection capabilities enable NGFWs to quickly recognize and respond to cyber threats by being trained on extensive databases of known threats, allowing them to infer and counter new variants automatically. Lanner's NCA-4240, featuring 14th Gen Intel® Core™ desktop processors, is optimized for AI-based NGFW performance, balancing cost, power consumption, and form factor for branch office applications.

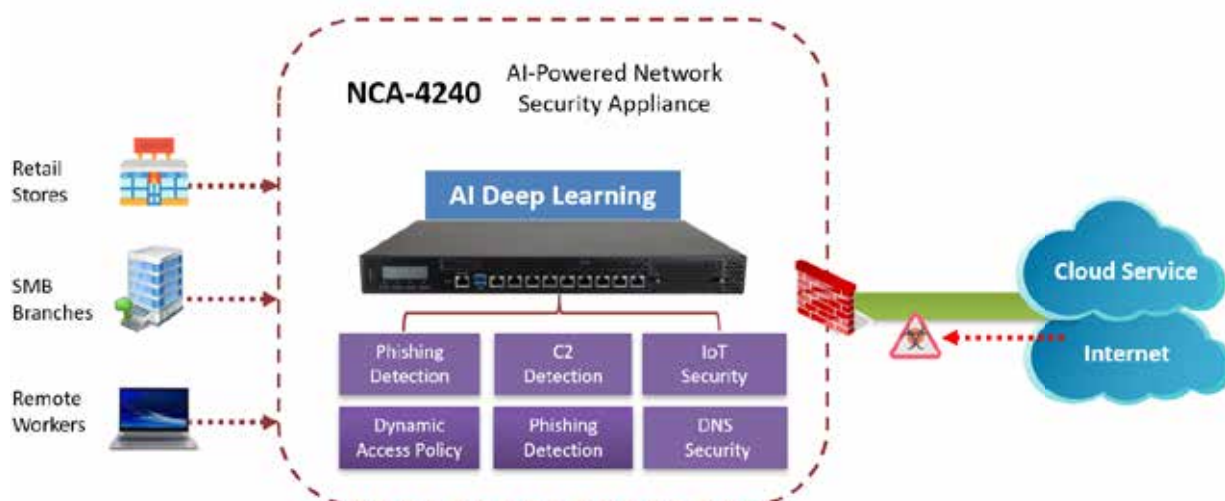

Network AI Appliance



Intel Amston Lake



Intel Raptor Lake



AMD Genoa/Bergamo

Model Name	NCA-1250	NCA-4240	NCA-5330
Processor System	Intel® Atom x7000 & N Series x7425E/N97 or x7405C/x7835RE	12/13/14th Gen Intel® Core™ / Pentium® / Celeron®	AMD EPYC 9004 Series (Genoa/Bergamo)
AI Acceleration Support	Integrated Intel® UHD Graphics 770	Integrated Intel® UHD Graphics 770	NVIDIA L4, or any HHHL GPU Card (up to 75W)
Fanless	Yes	3x Smart Fans	5x Individual Hot-swappable Cooling Fans
Memory	16GB	64GB	512GB
Storage	1x M.2 (SATA) 2280 1x eMMC 16GB Onboard (By SKU)	2x 2.5" HDD/SSD SKU A: 1x M.2 2242 SATA SKU B: 1x M.2 2242 SATA & 1x M.2 2280 NVME	2x 2.5" SSD/HDD 1x M.2 2280 (SATAIII / PCIe*5)
Ethernet	5x 2.5GbE RJ45, 1x 2.5GbE RJ45 (by SKU)	1x GbE RJ45, 8x 2.5GbE RJ45, 1x NIC Slot	1x GbE RJ45, x 4x NIC Slots
I/O	1x Console, 1x USB 3.0	1x Console, 2x USB 3.0	1x Console, 2x USB 3.0, 1x LOM (optional)
Expansion	1x M.2 3042/3050/3052 for 5G/LTE	1x PCIe*8 Gen4 FH/HL (By SKU) 1x M.2 2230 E-key (By SKU)	1x PCIe*8 HH/HL (optional)
Power	100 ~ 240VAC	100 ~ 240VAC	100 ~ 240VAC
Mechanical (W x D x H)	231 x 200 x 44 mm	438 x 321 x 44 mm	438 x 650 x 44 mm
Environment	0°C-40°C	0°C-40°C	0°C-40°C
Driver Support	Linux	Linux	Linux
Certification	RoHS, CE/FCC Class B	RoHS, CE/FCC Class A, UKCA, UL	RoHS, CE/FCC Class A, UL

Network AI Appliance



Intel® Sierra Forest / Granite Rapids



Intel® Sierra Forest / Granite Rapids



Intel Emerald Rapids


Model Name	NCA-6050 NEW	NCA-6250 NEW	NCA-6530
Processor System	Intel® Xeon® 6 Family Processor (Sierra Forest-SP/Granite Rapids- SP)	Intel® Xeon® 6 Processors with P cores & E cores	5th Gen Intel® Xeon® Scalable Processor
AI Acceleration Support	NVIDIA H200, B40 or any FHFL GPU cards (up to 600W)	NVIDIA L40, L4 or any FHFL GPU cards (up to 300W)	NVIDIA L40S or any FHFL GPU cards (up to 350W)
Fanless	4x Smart Fans	4x Smart Fans	6x Smart Fans
Memory	1024GB	1536GB	1536GB
Storage	2x U.2 NVME SSD KIT	2x 2.5" U.2 NVME SSD Hot-swappable 1x M.2 22110/2280/2242 M-key NVME 1x M.2 2280/2242 M-key NVME 1x M.2 2242/3042 SATA*4	2x 2.5" Swappable HDD/SSD or 12x 2.5" NVMe Swappable HDD/SSD (by SKU) 2x M.2 2280 NVME, 1x M.2 2280 SATA
Ethernet	1x GbE RJ45	2x GbE RJ45, 8x NIC Slots	2x GbE RJ45, 8x NIC Slots
I/O	1x Console, 2x USB 3.0, 1x LOM, miniDP	1x Console, 1x LOM, 2x USB 3.0, 1x VGA	1x Console, 1x LOM, 2 x USB 3.0, 1x VGA
Expansion	Rear: 2x FHHL Single-Deck PCIe Cards (Optional) Front: 2x FHFL Double-Deck PCIe Cards (Optional)	2x PCIe*16 Gen5	2x PCIe*16 FHFL or 2x PCIe*16 FHHL
Power	200~240VAC	100~240VAC	200~240VAC
Mechanical (W x D x H)	438 x 650 x 88 mm	438 x 650 x 88 mm	438 x 760 x 88 mm
Environment	0°C-40°C	0°C-40°C	0°C-40°C
Driver Support	Linux	Linux	Linux
Certification	CE/FCC Class A, UL	CE/FCC Class A, UL, UKCA, VCCI	CE/FCC Class A, UL

Telco AI & Agentic AI

AI RAN

Consolidating AI at the edge with telco networks through an edge AI platform accelerates digital transformation and enhances value creation. Edge AI optimizes network operations by analyzing massive volumes of network data in real-time, and empowers the RAN Intelligent Controller (RIC), advancing RAN capabilities with AI to improve spectral and operational efficiency.


Lanner provides scalable, carrier-grade edge AI servers that consolidate CPU, GPU, and DPU resources into a single appliance. These edge AI servers integrate Intel Xeon or NVIDIA GH200 processors, support multiple PCIe*16 slots, and are compatible with NVIDIA L4 and L40S GPUs, NVIDIA BlueField-3 DPUs, and NVIDIA ConnectX-7 network adapters.

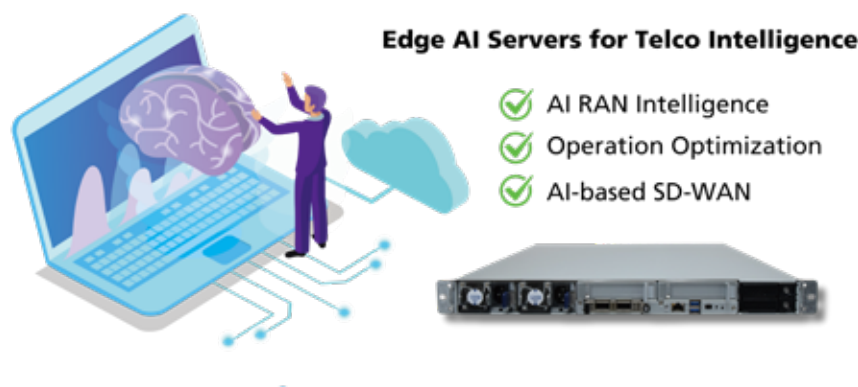


Mainstream LLMs & GenAI

Edge AI serves as a crucial enabler for Generative AI and large language models (LLMs) by providing the infrastructure to train and deploy these models locally. This approach enhances data privacy, reduces latency, and eliminates the need for constant cloud communication, leading to faster, more secure, and cost-effective AI solutions. By processing data at the edge, enterprises can harness the full potential of Gen AI and LLMs while minimizing cybersecurity risks and transmission costs.


Lanner provides edge AI servers to enable enterprises to run large-scale LLMs and perform generative AI LLM training and inferencing, delivering high-performance, low-latency AI processing directly at the edge.

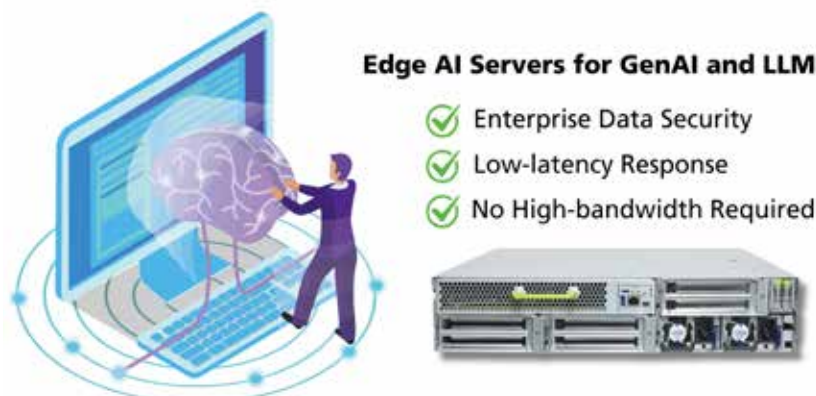

NVIDIA MGX Server: ECA-6051

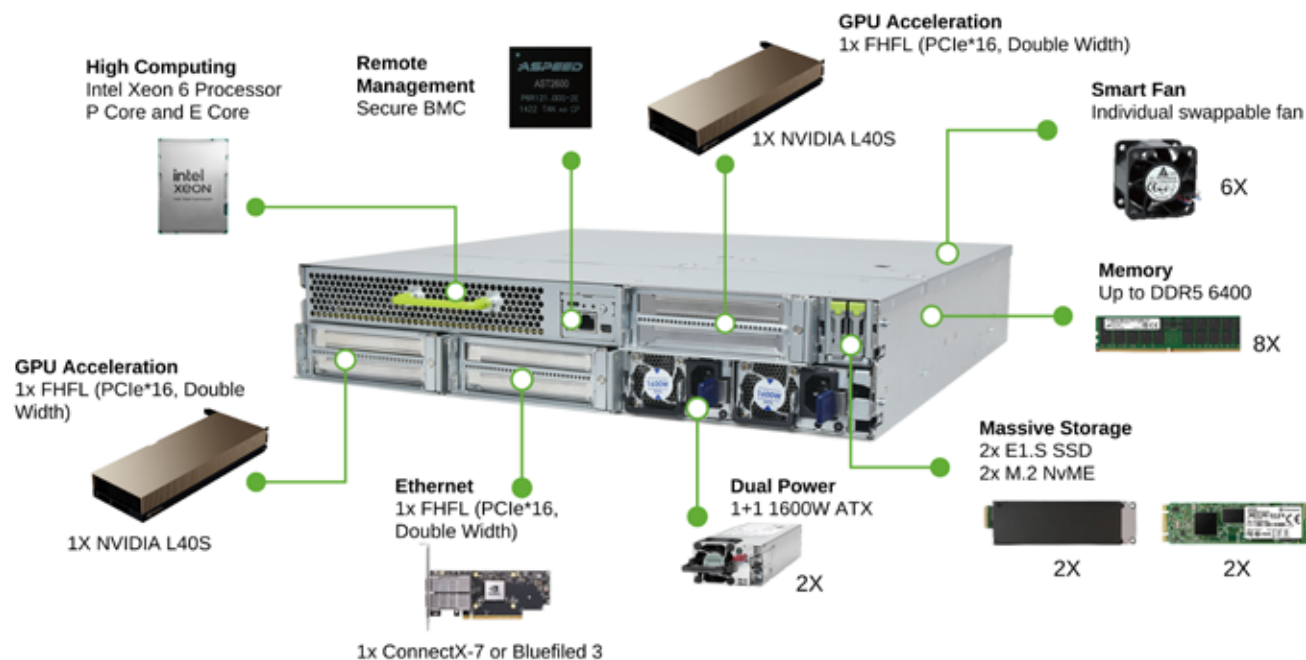


Edge AI Server

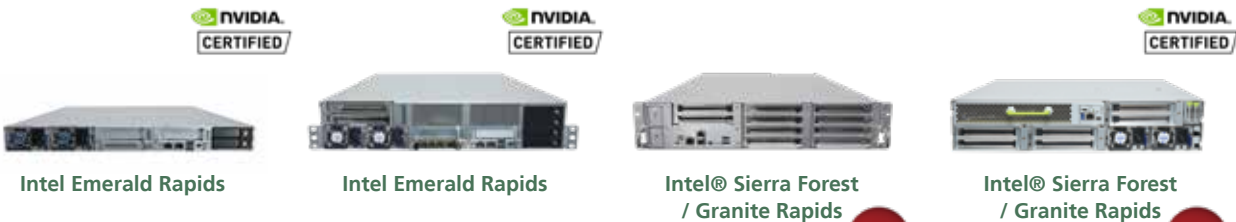


Model Name	ECA-5540	ECA-6040	ECA-6050	ECA-6051
Processor System	5th/4th Gen Intel® Xeon® Scalable Processor (Sapphire Rapids-SP/EMR-SP)	5th/4th Gen Intel® Xeon® Scalable Processor (Sapphire Rapids-SP/EE/EMR-SP)	Intel® Xeon® 6 Family Processor (Sierra Forest-SP/Granite Rapids-SP)	Intel® Xeon® 6 Family Processor (Sierra Forest-SP/Granite Rapids-SP)
AI Acceleration Support	NVIDIA L4, L40S, B40 or any FHFL GPU cards (up to 350W)	NVIDIA L4, L40S, B40 or any FHFL GPU cards (up to 350W)	NVIDIA L40S, H200, B40 or any FHFL GPU cards (up to 600W)	NVIDIA L4, L40S, B40 or any FHFL GPU cards (up to 350W)
Fanless	6x Smart Fans	6x Smart Fans	6x Smart Fans	6x Smart Fans
Memory	1024GB	1024GB	1024GB	1024GB
Storage	2x 2.5" HDD/SSD or 2x U.2 2x M.2 M-key NVME	4x 2.5" HDD/SSD or 4x U.2 1x M.2 NVME M-key 1x M.2 2280 M-key	4x E1.S SSD 2x M.2 NVMe M-key	2x E1.S SSD 2x M.2 NVMe (PCIe)
Ethernet	1x GbE RJ45 for MGMT	1x GbE RJ45 for MGMT	1x GbE RJ45 for MGMT	1x GbE RJ45 for MGMT
I/O	1x Console, 2x USB 3.0, 1x LOM, miniDP	1x Console, 2x USB 3.0, 1x LOM, miniDP	1x Console, 2x USB 3.0, 1x LOM, miniDP	1x Console, 1x USB 3.0, 1x LOM, miniDP
Expansion	1x PCIe*16 FHFL (by CPU) 2x PCIe*16 LP or 1x PCIe*8 FHHL, 1x OCP3.0 Slot	2x PCIe*16 FHFL, 2x PCIe*8 LP 1x OCP3.0 Slot	4x PCIe*16 FHFL 1x PCIe*16 FHHL	3x PCIe*16 FHFL
Power	110~240VAC	200~240VAC	200~240VAC	200~240VAC
Mechanical	438 x 580 x 44 mm	438 x 580.1 x 88 mm	438 x 760 x 88 mm	438 x 420 x 88 mm
Environment	0°C-40°C	0°C-40°C	0°C-40°C	0°C-40°C
Driver Support	Linux	Linux	Linux	Linux
Certification	CE/FCC, Class A, UL	CE/FCC Class A, UL	CE/FCC Class A, UL	RoHS, CE/FCC Class A, UL, NEBS (Level 3)

AI Starter Kit

Lanner's Edge AI Starter Kits aim to deliver an all-in-one platform composed of AI-accelerated hardware and application-tailored software to accelerate time-to-market AI deployment at the industrial edge. This comprehensive kit is designed for various applications, including vision inspection, predictive maintenance, and operator monitoring.

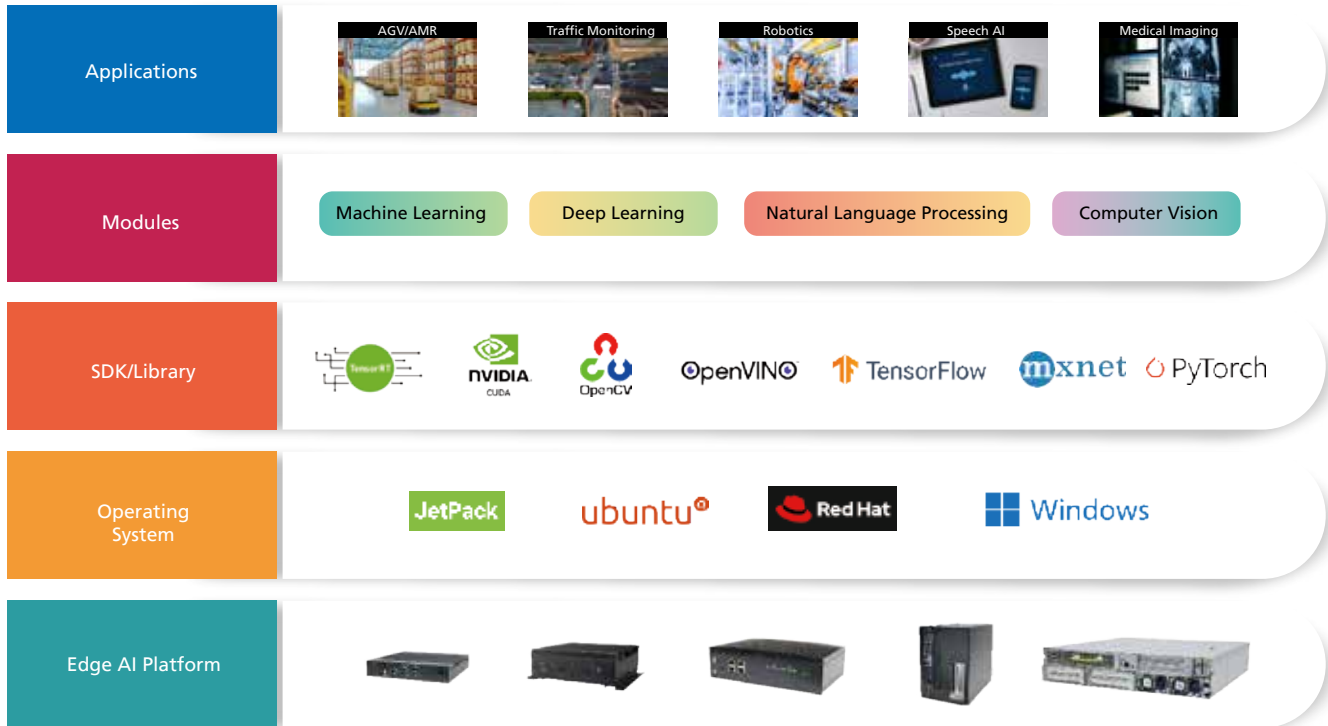

NVIDIA Software Supported

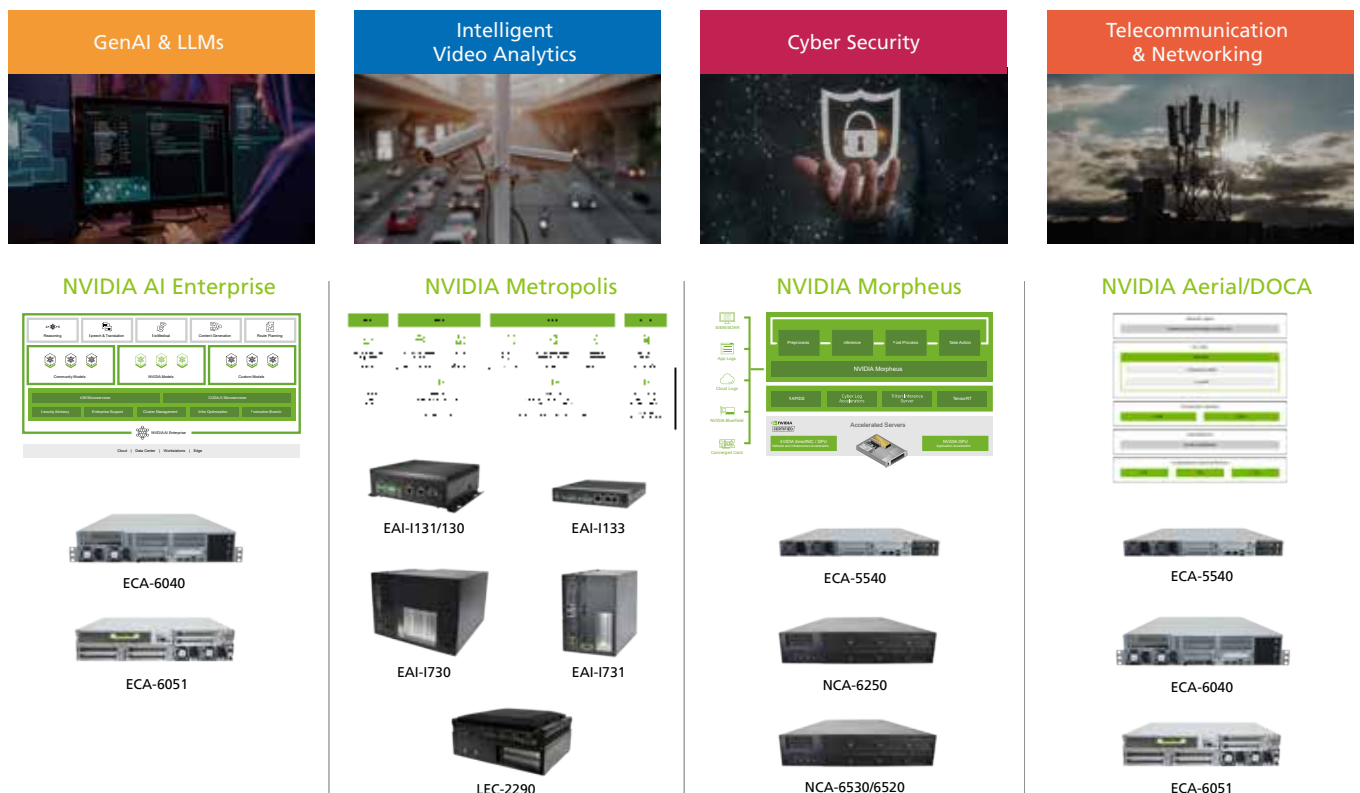

NVIDIA

Lanner provides Edge AI appliances that support the NVIDIA JetPack SDK, offering robust tools for AI development and deployment. These appliances leverage NVIDIA's powerful AI capabilities, enabling seamless integration and efficient execution of complex AI models at the edge..



Intel

Powered by the Intel® Distribution of OpenVINO™ toolkit, EIS accelerates development, enabling quick integrations of pre-trained models (e.g., Tensorflow, Caffe, etc.) for object recognition, classification, and facial recognition in vision-based solutions.

Edge AI Starter Kit



NVIDIA Jetson Orin



NVIDIA Jetson Orin



NVIDIA A2 GPU



NVIDIA L4 GPU

Model Name	EAI-I131	EAI-I133	LEC-2290E	LEC-2290L
Processor System	NVIDIA® Jetson Orin NX/Nano	NVIDIA® Jetson Orin NX/Nano	Intel® Core™ i7	Intel® Core™ i7
GPU	NVIDIA® Jetson Orin NX/Nano	NVIDIA® Jetson Orin NX/Nano	NVIDIA® A2 60W	NVIDIA® L4 72W
Memory	LPDDR5 16/8/4 GB (By SKU)	LPDDR5 16/8/4 GB (By SKU)	64GB DDR4	64GB DDR4
Storage	M.2 128GB NVMe	M.2 128GB NVMe	128GB mSATA 256GB SSD	128GB mSATA 256GB SSD
Supported OS	Linux Ubuntu 22.04, NVIDIA Jetpack 6.2	Linux Ubuntu 22.04, NVIDIA Jetpack 6.2	Ubuntu 22.04	Ubuntu 22.04
Supported SDK	NVIDIA AI Stacks	NVIDIA AI Stacks	Intel OpenVINO NVIDIA AI Stacks	Intel OpenVINO NVIDIA AI Stacks

Edge AI Starter Kit



NVIDIA A10 GPU



NVIDIA A2 GPU



NVIDIA L4 GPU



Intel UHD Graphics 770

Model Name	EAI-I730M	EAI-I731E	EAI-I731L	NCA-4240C
Processor System	Intel®14th Gen. Core i Processors with R680E Chipset	Intel®14th Gen. Core i Processors with R680E Chipset	Intel®14th Gen. Core i Processors with R680E Chipset	Intel®14th Gen. Core i Processors with Q670E Chipset
GPU	NVIDIA® A10 150W	NVIDIA® A2 60W	NVIDIA® L4 72W	Intel® UHD Graphics 770 GPU. 1x PCIe*8 Gen4 FHHL
Memory	2x DDR4 3200MHz SODIMM Up to 64GB	2x DDR4 3200MHz SODIMM Up to 64GB	2x DDR4 3200MHz SODIMM Up to 64GB	2x DDR5 5600MHz UDIMM Up to 32GB
Storage	1x M.2 B-key SATA 1x M.2 M-key NVMe 4x 2.5" SATA drive bay	1x M.2 B-key SATA 1x M.2 M-key NVMe 2x 2.5" SATA drive bay	1x M.2 B-key SATA 1x M.2 M-key NVMe 2x 2.5" SATA drive bay	2x 2.5" HDD/SSD 1x M.2 E-key NVME (PCIe Gen4*4)
Supported OS	Ubuntu 22.04	Ubuntu 22.04	Ubuntu 22.04	Ubuntu 22.04
Supported SDK	Intel OpenVINO NVIDIA AI Stacks	Intel OpenVINO NVIDIA AI Stacks	Intel OpenVINO NVIDIA AI Stacks	Intel OpenVINO NVIDIA AI Stacks

AI Acceleration Cards

Lanner's Falcon PCIe AI Acceleration Cards offer a convenient solution for engineers seeking to offload CPU load for low-latency deep learning inference. Equipped with high-density AI processors, the Falcon supports 1 to 6 Hailo-8™ AI processors, providing a modular Edge AI solution with exceptional processing power and energy efficiency

The Falcon AI Accelerator Cards enable legacy devices, including NVRs, Edge AI boxes, industrial PCs, and robots, to run video-intensive, mission-critical Edge AI applications via a standard PCIe interface. These applications encompass video analytics, traffic management, access control, and more.



High Processing Power
Up to 156 TOPS
8000FPS of ResNet-50



High Efficiency
Typical Power Consumption 35W



Cost-effective
Lowest TOPs/\$



Advanced AI Applications
Supports state-of-the-art
NN model in high resolution



Various DL Architectures
Hailo Model Zoo
Hailo TAPAAAS AI Applications



Ease of HW & SW integration
Hailo AI Dataflow Compiler
Standard PCIe single slot form-factor

Falcon H8



Model No.	AI VPU	Remark
FALCON-H8A	6x Hailo-8™ AI Processor	Commercial-grade
FALCON-H8B	5x Hailo-8™ AI Processor	Commercial-grade
FALCON-H8C	4x Hailo-8™ AI Processor	Commercial-grade
FALCON-H8D	6x Hailo-8™ AI Processor	Industrial-grade
FALCON-H8E	5x Hailo-8™ AI Processor	Industrial-grade
FALCON-H8F	4x Hailo-8™ AI Processor	Industrial-grade

Falcon Lite






Model No.	AI VPU	Remark
Falcon H8L16A	2x Hailo-8™ AI Processor	Commercial-grade
Falcon H8L16D	4x Hailo-8™ AI Processor	Commercial-grade
Falcon H8L16E	2x Hailo-8™ AI Processor	Industrial-grade
Falcon H8L16H	4x Hailo-8™ AI Processor	Industrial-grade
Falcon H8L8A	2x Hailo-8™ AI Processor	Commercial-grade
Falcon H8L8D	4x Hailo-8™ AI Processor	Commercial-grade
Falcon H8L8EE	2x Hailo-8™ AI Processor	Industrial-grade
Falcon H8L8H	4x Hailo-8™ AI Processor	Industrial-grade
Falcon H8L4A	1x Hailo-8™ AI Processor	Commercial-grade
Falcon H8L4B	2x Hailo-8™ AI Processor	Commercial-grade
Falcon H8L4E	1x Hailo-8™ AI Processor	Industrial-grade
Falcon H8L4F	2x Hailo-8™ AI Processor	Industrial-grade

■ NVIDIA GPU Supported

Lanner's Edge AI platforms support a wide range of NVIDIA GPU cards, delivering scalable and powerful AI performance at the edge. These platforms enable real-time data processing, deep learning, and AI-driven analytics across various applications, from smart cities to industrial automation. With Lanner, businesses can deploy and easily scale AI solutions to meet growing demands.

Model Name		L4	L40S	B40	H200
ECA-4035		✓	✓		
ECA-5540		✓	✓	✓	
ECA-6040		✓	✓	✓	
ECA-6050		✓	✓	✓	✓
ECA-6051		✓	✓	✓	
NCA-6050		✓	✓	✓	✓
NCA-5330		✓			

Model Name		A2	L4	A10	RTX 2000E Ada	RTX 4000 SFF Ada	RTX 4000E Ada	RTX 5000E Ada	RTX 6000E Ada
LEC-2290		✓	✓						
EAI-I731		✓	✓		✓	✓			
EAI-I730		✓	✓	✓	✓	✓	✓	✓	✓

Corporate

Lanner Electronics Inc.
7F, No.173, Sec.2, Datong Rd.
Xizhi District,
New Taipei City 221, Taiwan
T: +886-2-8692-6060
F: +886-2-8692-6101
E: contact@lannerinc.com

Taiwan

立端科技股份有限公司
221新北市汐止區
大同路二段173號7樓
T: +886-2-8692-6060
F: +886-2-8692-6101
E: contact@lannerinc.com

USA

Lanner USA
47790 Westinghouse Drive
Fremont, CA 94539
T: +1-855-852-6637
F: +1-510-979-0689
E: sales_us@lannerinc.com

China

立华科技
北京市昌平区
回龙观回南北路果栋LOFT9层
T: +86 010-82795600
F: +86 010-62963250
E: services@ls-china.com.cn

Canada

Lanner Canada
6285 Northam
Dr. Unit 112 Mississauga
ON L4V 1X5
T: +1 877-813-2132
F: +1 905-362-2369
E: sales_ca@lannerinc.com

Europe

Lanner Europe B.V.
Wilhelmina van Pruysenweg 104
2595 AN The Hague,
The Netherlands
T: +31 70-701-3256
E: sales_eu@lannerinc.com

Lanner

Please verify specifications before quoting. All product specifications are subject to change without notice. No part of this publication may be reproduced in any form or by any means, electronic, photocopying or otherwise without prior written permission of Lanner Electronics Inc. All brand names and product names are the trademarks or registered trademarks of their respective companies.

© Lanner Electronics Inc., 2025 www.lannerinc.com

