


LEC-2290H

Intelligent Edge Appliance
With Falcon-H8 PCIe AI Accelerator Card

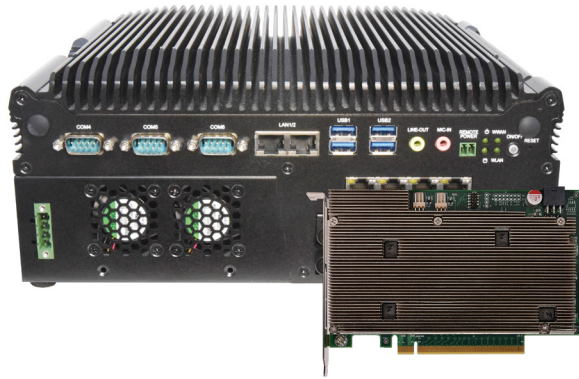

■ Features

- Intel® Core™ i7 Processor (Coffee Lake)
- Falcon-H8 AI Accelerator Card With 6x Hailo-8™ AI CPUs
- 2x DDR4 2133/2400 SO-DIMM, Max. 64GB
- 2x GbE RJ45, 4x PoE, 4x USB3.0, 6x COM, 8x DIO
- 2x Removable HDD/SSD External Slot w/ RAID, 1x mSATA
- 1x PCIe*16, 1x Mini-PCIe (PCIe + USB2.0) w/ Nano-SIM, 1x B Key M.2 (PCIe + USB3.0) w/ Nano-SIM
- Built-in TPM 2.0 & IPMI Support

■ Specification

Processor System	
CPU	Intel® Core™ i7 Processor (Coffee Lake)
Frequency	3.2GHz/1.8GHz
Core Number	6/8
BIOS	AMI 256Mbit SPI Flash BIOS
Chipset	C246
Fanless	
	No
Memory	
Technology	DDR4 2133/2400 SO-DIMM
Max. Capacity	64 GB
Socket	2x 260-pin SO-DIMM
Graphic	
Controller	Intel® UHD Graphics 630
Interface	2x HDMI
Audio	
Codec	TSI 92HD73C HD
Interface	1x Mic-in, 1x Line-out
Ethernet	
Controller	6x Intel i210IT
Speed	10/100/1000 Mbps
Interface	2x GbE RJ45 4x PoE
Storage	
Type	SATA III
Installation	2x Removable HDD/SSD External Slot w/ RAID
Type	mSATA
Installation	1x mSATA
I/O	
Serial Port	6x D-sub 9, RS232/422/485
Digital I/O	1x Terminal Block Isolation, 8x DI (12V), 8x DO (Sink Mode, 12V@100mA)
USB	4x USB 3.0 Type A
Power-On/Reset Button	1x Power-On, 1x Reset Button
Remote Power Switch	1x 2-pin Remote Power Switch


LED	Power/Storage/LTE/Wifi
Expansion Interface	
Mini-PCIe	1x Mini-PCIe (PCIe + USB2.0) w/ Nano-SIM
PCIe	1x PCIe *16 (support *4/*8/*16)
M.2	1x B Key M.2 (PCIe + USB3.0) w/ Nano-SIM
Watchdog Timer	
Watchdog Timer 1~255 Level Time Interval System Reset, Software Programmable	
Power	
Power Type	ATX
Power Supply Voltage	9~30 VDC
Connector	1x 4-pin Terminal Block
Power Consumption (Idle)	29.5W@ +12VDC-in (see *2)
Power Consumption (Full Load)	121.6W@ +12VDC-in (see *2)
Environment	
Operating Temperature	-20°C~45°C
Storage Temperature	-40°C~70°C
Relative Humidity	10%~90% (Non-condensing)
Vibration	IEC 60068-2-64, 0.5Grms, random 5 ~500 Hz, 40 mins/axis
Mechanical	
Dimension (W x H x D)	275 x 115 x 225 mm
Construction	Aluminum Extrusion & SGCC
Weight	7.0 kg
Mounting	Wallmount
Driver Support	
Microsoft Windows	Windows 10 IoT 64bits Series Ubuntu 18.10 64bit or Above CentOS 7 or Above Fedora 30 64bit or Above
Linux	Kernel 3.12
Certification	
EMC	CE/FCC, Class A

■ Product I/O View



- | | | | |
|--------------------------|------------------------|-----------------------|--------------------------|
| A COM x3 | F DC Input | K DIO | P PGN Module Slot |
| B LAN | G PoE | L Display Port | Q PCIe Slot |
| C USB 3.0 | H HDD/SSD Bays | M HDMI | |
| D LINE-out/MIC-in | I Status LED | N COM | |
| E Remote Power | J On/Off Switch | O DC Input | |

■ Dimensions (W x H x D) 275 x 115 x 225 mm (10.8" x 4.5" x 8.9")

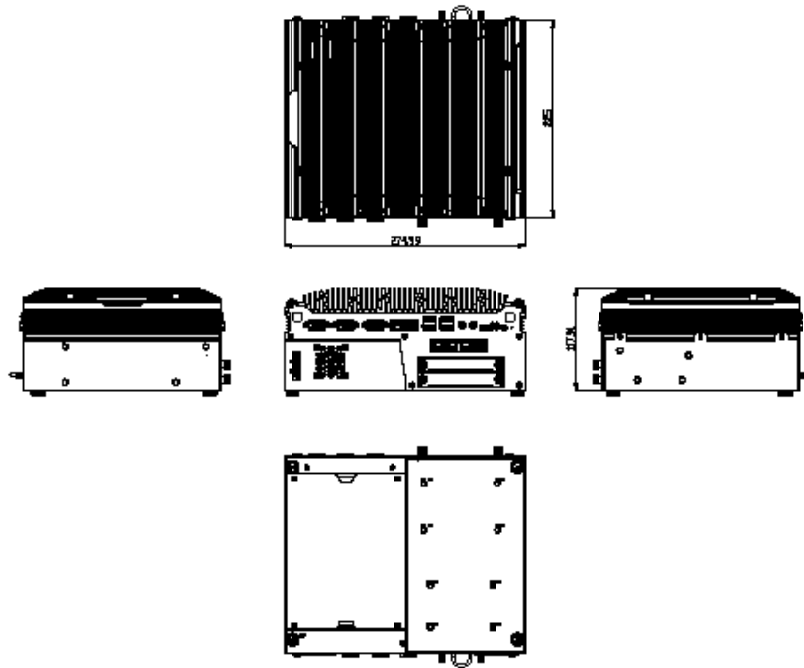

■ Ordering Information

LEC-2290H

Intel® Core™ i7-9700TE, 32GB System Memory, 128GB mSATA and 2.5" 256GB SATA Storage, +9~30VDC input with 270W AC/DC adapter, 1*PCIe x16 expansion slot (support *4/*8/*16) with Hailo 8 AI computing VPU Card (Hailo AI Software Suite preinstall), with TPM and optional IPMI module

V.1-2025.3.14

Lanner

© Lanner Electronics Inc. All rights reserved.
All product specifications are subject to change without notice.
contact@lannerinc.com | www.lannerinc.com